

指针式千分表

2 系列 — 长行程型



2050S



2052S



2330S-10



(参见第 9 页)



2050S-60
2050S
2050S-19



2052S
2052S-19



2330S-10



2320S-10



2952S



防震型



防水型

最低休止点
带有气阀

宝石轴承型

带有同轴
旋转计数器

反向读数型

性能参数

公制型

ISO/JIS 型

分度值	货号		测量范围	精度	表盘读数值	测力						
	带耳后盖	平型后盖	(测量范围 / 每圈行程)									
0.01mm	2050S	2050SB	20mm (1mm)	±20μm	0-100	2.0N 以下	—	—	✓	—	—	—
0.01mm	2050S-60	2050SB-60	20mm (1mm)	±20μm	0-100	2.5N 以下	—	✓	—	—	—	—
0.01mm	2050S-19	2050SB-19	20mm (1mm)	±20μm	0-100	2.0N 以下	✓	—	✓	✓	—	—
0.01mm	2320S-10	2320SB-10	20mm (1mm)	±20μm	0-100	2.0N 以下	—	—	✓	✓	✓	—
0.01mm	2052S	2052SB	30mm (1mm)	±25μm	0-100	2.5N 以下	—	—	✓	—	—	—
0.01mm	2052S-19	2052SB-19	30mm (1mm)	±25μm	0-100	2.5N 以下	✓	—	✓	✓	—	—
0.01mm	2330S-10	2330SB-10	30mm (1mm)	±25μm	0-100	2.5N 以下	—	—	✓	✓	✓	—
0.01mm	2952S	2952SB	30mm (1mm)	±25μm	100-0	2.5N 以下	—	—	✓	—	—	✓

英制型


ANSI/AGD 型

分度值	货号		测量范围	精度	表盘读数值	测力						
	带耳后盖	平型后盖	(测量范围 / 每圈行程)									
.01"	2204S	2204SB	1" (.1")	±.005"	0-1000	1.8N 以下	—	—	—	—	—	—
.001"	2416S	2416SB	1" (.1")	±.001"	0-100	1.8N 以下	—	—	—	—	—	—
.001"	2416S-06	2416SB-06	1" (.1")	±.001"	0-100	1.8N 以下	—	—	—	—	—	—
.001"	2416S-10	2416SB-10	1" (.1")	±.001"	0-100	1.8N 以下	—	—	—	✓	—	—
.001"	2416S-60	2416SB-60	1" (.1")	±.001"	0-100	2.5N 以下	—	✓	—	—	—	—
.001"	2417S	2417SB	1" (.1")	±.001"	0-50-0	1.8N 以下	—	—	—	—	—	—
.001"	2424S-19	2424SB-19	2" (.1")	±.003"	0-100	2.5N 以下	✓	—	—	✓	—	✓
.0005"	2776S	2776SB	1" (.05")	±.002"	0-50	1.8N 以下	—	—	—	—	—	—
.0005"	2776S-60	2776SB-60	1" (.05")	±.002"	0-50	2.5N 以下	—	✓	—	—	—	—
.001"	2904S	2904SB	1" (.1")	±.002"	100-0	2.0N 以下	—	—	✓	—	—	—

尺寸

ISO/JIS 型

单位: mm

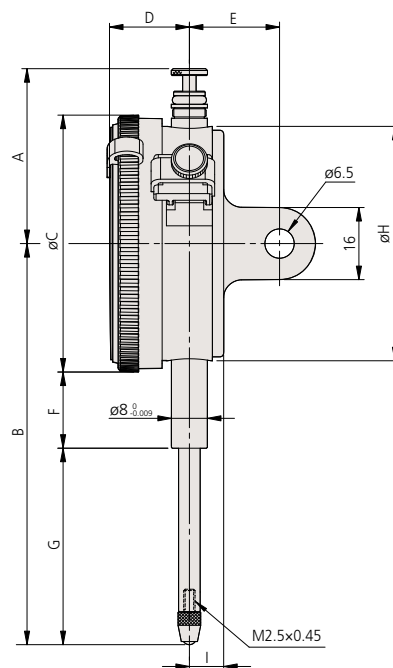

货号	A	B	C	D	E	F	G	H	I
2050S	38.8	75.2	57	17.7	20	16.9	29.8	52	7.6
2050S-60	59.8	87.2	57	17.7	20	12.3	46.4	52	7.6
2050S-19	38.8	75.2	57	17.7	20	16.9	29.8	52	7.6
2320S-10	38.8	75.2	57	17.7	20	16.9	29.8	52	7.6
2052S	38.8	88.7	57	17.7	20	16.9	43.3	52	7.6
2052S-19	38.8	88.7	57	17.7	20	16.9	43.3	52	7.6
2330S-10	38.8	88.7	57	17.7	20	16.9	43.3	52	7.6
2952S	38.8	88.7	57	17.7	20	16.9	43.3	52	7.6