

千分尺基准杆


167 系列

特点

- 用于外径千分尺调零。
- 光滑的测量面。
- 隔热手柄可防止体温导致的热膨胀。



尺寸

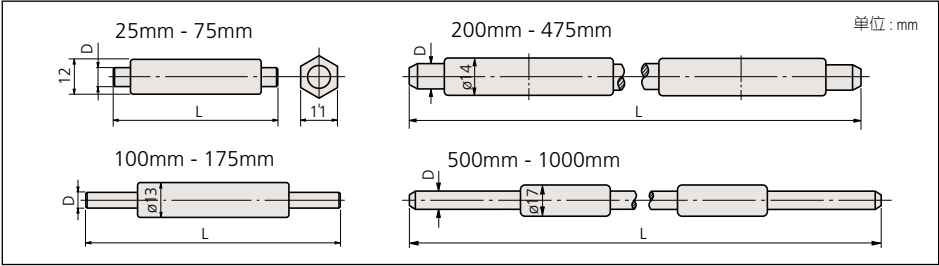

性能参数

公制型			
长度 (L)	货号	直径 (D)	公差值
25mm	167-101	6.35mm	±1.5μm
50mm	167-102	6.35mm	±2.0μm
75mm	167-103	6.35mm	±2.5μm
100mm	167-104	7.9mm	±3μm
125mm	167-105	7.9mm	±3.5μm
150mm	167-106	7.9mm	±4μm
175mm	167-107	7.9mm	±4.5μm
200mm	167-108	9.4mm	±5.0μm
225mm	167-109	9.4mm	±5.5μm
250mm	167-110	9.4mm	±6.0μm
275mm	167-111	9.4mm	±6.5μm
300mm	167-112	9.4mm	±7μm
325mm	167-113	9.4mm	±7.5μm
350mm	167-114	9.4mm	±8μm
375mm	167-115	9.4mm	±8.5μm
400mm	167-116	9.4mm	±9μm
425mm	167-117	9.4mm	±9.5μm
450mm	167-118	9.4mm	±1.0μm
475mm	167-119	9.4mm	±10.5μm
500mm	167-120	11.9mm	±11μm
525mm	167-121	11.9mm	±11.5μm
550mm	167-122	11.9mm	±12μm
575mm	167-123	11.9mm	±12.5μm
600mm	167-124	11.9mm	±13μm
625mm	167-125	11.9mm	±13.5μm
650mm	167-126	11.9mm	±14μm
675mm	167-127	11.9mm	±14.5μm
700mm	167-128	11.9mm	±15μm
725mm	167-129	11.9mm	±15.5μm
750mm	167-130	11.9mm	±16μm
775mm	167-131	11.9mm	±16.5μm
800mm	167-132	11.9mm	±17μm
825mm	167-133	11.9mm	±17.5μm
850mm	167-134	11.9mm	±18μm
875mm	167-135	11.9mm	±18.5μm
900mm	167-136	11.9mm	±19μm
925mm	167-137	11.9mm	±19.5μm
950mm	167-138	11.9mm	±20μm
975mm	167-139	11.9mm	±20.5μm
1000mm	167-140	11.9mm	±21μm

允许值小于 2000mm

英制型			
长度 (L)	货号	直径 (D)	公差值
1"	167-141	.25"	±1.5μm
2"	167-142	.25"	±2.0μm
3"	167-143	.25"	±2.5μm
4"	167-144	.31"	±3μm
5"	167-145	.31"	±3.5μm
6"	167-146	.31"	±4μm
7"	167-147	.31"	±4.5μm
8"	167-148	.37"	±5.0μm
9"	167-149	.37"	±5.5μm
10"	167-150	.37"	±6.0μm
11"	167-151	.37"	±6.5μm
12"	167-152	.37"	±7μm
13"	167-153	.37"	±7.5μm
14"	167-154	.37"	±8μm
15"	167-155	.37"	±8.5μm
16"	167-156	.37"	±9μm
17"	167-157	.37"	±9.5μm
18"	167-158	.37"	±1.0μm
19"	167-159	.37"	±10.5μm
20"	167-160	.47"	±11μm
21"	167-161	.47"	±11.5μm
22"	167-162	.47"	±12μm
23"	167-163	.47"	±12.5μm
24"	167-164	.47"	±13μm
25"	167-165	.47"	±13.5μm
26"	167-166	.47"	±14μm
27"	167-167	.47"	±14.5μm
28"	167-168	.47"	±15μm
29"	167-169	.47"	±15.5μm
30"	167-170	.47"	±16μm
31"	167-171	.47"	±16.5μm
32"	167-172	.47"	±17μm
33"	167-173	.47"	±17.5μm
34"	167-174	.47"	±18μm
35"	167-175	.47"	±18.5μm
36"	167-176	.47"	±19μm
37"	167-177	.47"	±19.5μm
38"	167-178	.47"	±20μm
39"	167-179	.47"	±20.5μm
40"	167-180	.47"	±21μm

允许值小于 79"

技术参数

公差*: 参见性能参数
* 测量中心偏差的公差值
平面度: 0.3μm
平行度: 2μm

